


4x22 PowerWise® 1G 4PPoE OSP Unshielded, 1K FT Reel

Part Number: PW04-401-58

Status: Available

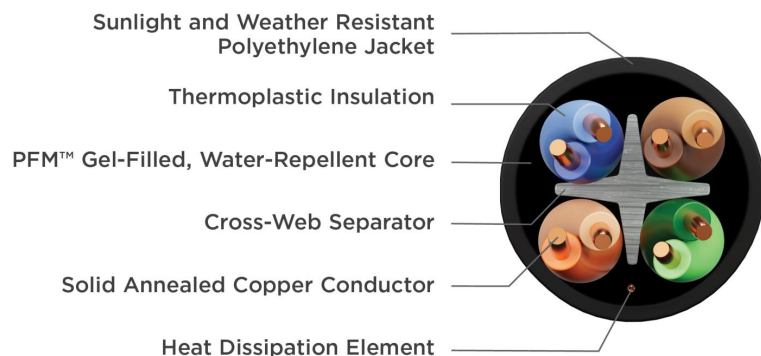

GENERAL SPECIFICATIONS

Jacket	Black, sunlight and weather resistant polyethylene
Jacket Color	Black
Filling Compound	PFM™ Gel-Filled, Water-Repellent Core
Standards Compliance	ANSI/TIA-568.2-D ANSI/ICEA S-107-704-2012 RoHS-compliant/RoHS 2-compliant REACH-compliant
NRTL Programs	UL Certified EPD RoHS-compliant/RoHS 2-compliant

COPPER SPECIFICATIONS

Pair Count	4
Conductor	Solid annealed copper
Conductor Count	8
AWG (mm)	22 (0.64)
Insulation	Polyolefin
Insulation Colors	Color Tip®: Light Blue, Blue, Light Orange, Orange, Light Green, Green, Light Brown, Brown
Heat Dissipation Element	Coated copper
Separator	Polyolefin cross-web
Characteristic Impedance (Ohms)	100 ± 15
Nominal Velocity of Propagation (%)	66

ENVIRONMENTAL SPECIFICATIONS

Operating Temp. Range	-40°F to +167°F (-40°C to +75°C)
Installation Temp. Range	-40°F to +140°F (-40°C to +60°C)
ANSI/ICEA S-100-685-2009 Tested down to -67°F (-55°C)	Section 7.1: -4°F (-20°C) cold bend test Section 7.2: +14°F (-10°C) cold impact test Section 7.3: -40°F (-40°C) anvil test

PHYSICAL CHARACTERISTICS

Nominal Diameter in (mm)	0.31 (7.9)
Nominal Weight lbs/kft (kg/km)	41 (61)
Package Length	1000
Package Type	Reel

Product Description

PowerWise® 1G 4PPoE cables provide the best performance and overall value for 4 Pair Power over Ethernet (4PPoE) applications requiring up to 100W of power and up to 2.5GBASE-T Ethernet performance. PowerWise® 1G 4PPoE cables are specifically designed to mitigate temperature build-up offer exceptional energy efficiency and ensure performance (up to 2.5GBASE-T Ethernet) over the lifetime of your system. Cable temperature increases are reduced and power efficiency is increased as a result of 22 gauge conductors and the heat dissipation element.

PowerWise® 1G 4PPoE cables are the best solution to connect and power your 4PPoE and extended distance applications compared to standard category cable designs.

PowerWise® 1G 4PPoE OSP Armored is a robust category cable designed to provide an extension of the LAN beyond the premises or in situations where the NEC code requires an OSP-rated cable when it is in contact with earth, whether in a conduit or not. The cable consists of four (4) balanced twisted pairs surrounded by Superior Essex PFM™ gel that does not drip or flow, even in cell tower applications at elevated temperatures. The jacketed core is covered with dry block and a corrugated, copper-clad steel armor providing exceptional Alien Crosstalk (AXT) performance. The outer jacket is an OSP-grade black polyethylene for superior sunlight and abrasion resistance. This armored design is suitable for the following deployments: duct, underground conduit, tower, lashed aerial, direct burial or open trench.

Applications

- 10BASE-T through 2.5GBASE-T Ethernet
- Power over Ethernet (PoE) - IEEE 802.3bt Type 1 to 4
- ATM and token ring
- HDBaseT Class A and B

Features

- Tested 350 MHz

Benefits

- Assures ample overhead for reliable transmission in an OSP-

- Corrugated, copper-clad steel armor
 - Dry block between armor and inner jacket
 - PFM gel-filled core construction
 - OSP-grade black polyethylene jacket
 - ColorTip® circuit identification system
 - Tested in most severe temperature conditions in bundle
- rated cable allowing extension of the premises LAN
 - Rugged shield provides protection against EMI/RFI and provides rodent resistance
 - Prevents water ingress between armor and inner cable preventing damage to equipment
 - Prevents intrusion of moisture and easily wipes clean during installation
 - Outside plant rated cable for years of reliable performance
 - Easily identifiable conductor mates even in low-light environments
 - AWG 22 insulated wire offers 88% power efficiency and lowest
- of 100 cables
 - Heat dissipation element
 - Ideal for extended distance over 100m
- temperature increase inside a bundle, the best of its class
 - Mitigate the heat to same level along the whole distance of the link for improved bandwidth performances
 - Guaranteed distance for different applications based on BER test performed by UL at UL facility



Technical Guideline

Special connectivity is required for these cable designs. Refer to the "Resources" section on our site for the Technical Guideline, "OSP Broadband Installation Guidelines," for more information.



Cautionary Information

For distance and warranty information, click [here](#) to view TG115 PowerWise® Extended Distance Frequently Asked Questions.